

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 November 2002 (14.11.2002)


PCT

(10) International Publication Number
WO 02/090909 A2

- (51) International Patent Classification⁷: G01J 3/51 (74) Agent: DUSSELDORP, Jan, C.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: PCT/IB02/01492
- (22) International Filing Date: 25 April 2002 (25.04.2002) (81) Designated States (*national*): CN, JP, KR.
- (25) Filing Language: English (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (26) Publication Language: English
- (30) Priority Data: 09/851,099 8 May 2001 (08.05.2001) US
Published:
— without international search report and to be republished upon receipt of that report
— entirely in electronic form (except for this front page) and available upon request from the International Bureau
- (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor: CHANG, Chin; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM FOR MEASURING CHROMATICITY COORDINATES

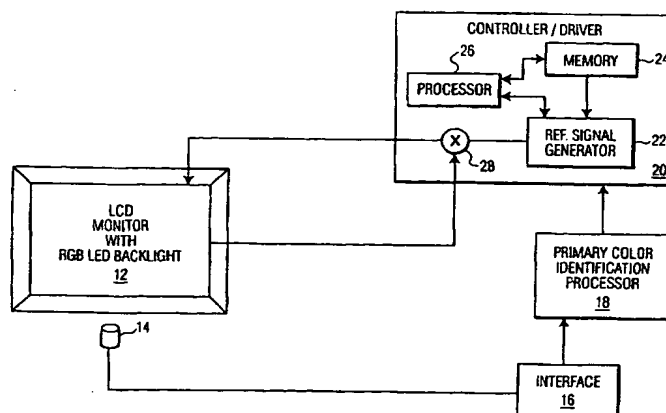

(57) Abstract: A system and method for identifying primary color chromaticity coordinates of a red, green and blue light sources includes a tristimulus filter the receives the combined light generated by the light sources. The light sources are preferably a group of red, green and blue light emitting diodes. A processor is configured to generate a plurality of test control signals that sets a desired intensity value for each of the red, green and blue LEDs. Based on these test control signals, the system is configured to measure three sets of chromaticity coordinates corresponding to the combined light generated by these red, green and blue LEDs. The processor thereafter calculates the color chromaticity coordinates of the LEDs, based on the measured coordinates of the combined light, and the intensity values of the LEDs, and the intensity values of the combined light. This calculation in accordance with one embodiment of the invention is accomplished by solving a matrix equation. Once the color coordinates of the individual light sources is uniquely calculated, the system measures the intensity values of light for each of the light sources that is necessary to provide a combined light with a desired color chromaticity coordinates. These intensity values can be used in a feedback control circuit to maintain the desired combined light as the LEDs change their characteristics from batch to batch or over time.

SYSTEM FOR MEASURING CHROMATICITY COORDINATES

This invention relates to a color coordinate measurement system and more specifically to an RGB primary color point identification and measurement system.

There is a continuous stride to improve the ways to calibrate color images generated by electronic systems, such as scanners, displays, printers, etc. With the increasing
5 use of light emitting diodes (LEDs) in a variety of applications, many manufacturers of devices that employ LEDs need efficient and reliable schemes to ensure quality and consistency in their products.

However, it is well known that due to various reasons, LEDs do not exhibit consistent characteristics. For example, various batches of LEDs manufactured under similar
10 factory conditions generate light that falls within a range of physical properties. Furthermore, those LEDs that have exact same characteristics at the outset, may perform differently over time due to dissimilar use and aging process.

An exemplary use of LEDs is the process of generating a white light by employing primary colors of Red, Green and Blue (RGB) LEDs. For example, many LCD
15 monitors use an array of red, green and blue LEDs to generate a white backlight. In order to ensure that the white light has a consistent color temperature and intensity, many manufacturers employ complex calibration schemes which leads to higher manufacturing costs.

The reason that it is difficult to ensure that a device such as a monitor
20 generates a consistent white backlight is that the color coordinates for each of the red, green and blue light sources is hard to measure. In accordance with one prior art scheme, it is possible to measure the color coordinates for each primary red, green and blue light sources by performing a sequential measurement procedure as explained below.

During the first step of this sequential procedure, the red and green light
25 sources are turned off, and only the blue primary color point is measured. Then, the red and blue light sources are turned off, and the green primary color point is measured. Finally, the green and blue light sources are turned off, and the red primary color point is measured. However, this scheme does not have a high numerical accuracy, as will be explained in more detail in reference with Figs. 4 and 5.

Thus, there is a need for a system that can accurately and economically measure the color coordinates for each primary red, green and blue light sources, such as LEDs so as to generate a consistent and desired white light or for that measure any light that employs these three primary light sources.

5 In accordance with one embodiment of the present invention, a primary color identification system includes a plurality of red, green and blue LED light sources configured to generate a desired RGB light having a specified chromaticity coordinates. A color filter, such as a tristimulus filter is disposed near the generated RGB light, and is coupled to a processor that is employed to measure the chromaticity coordinates of each of the red, green
10 and blue LED light sources. The system also includes a controller and driver circuitry that is configured to control and maintain the intensity of light (or lumen output level) generated by each of the red, green and blue LEDs. The system for a given intensity of the red, green and blue LED light source, measures the intensity of the generated RGB light, while the color filter measures the chromaticity coordinates of the generated RGB light. Based on these
15 measurements, the system is configured to detect the chromaticity coordinates of each of the red, green and blue LED light sources.

Once the chromaticity coordinates of the LED light sources is known, the system configures the controller and driver circuitry to maintain the desired intensity (or lumen output level) of each of the red, green and blue LED light sources, so as to maintain
20 the desired chromaticity coordinates of the generated RGB light.

In accordance with another embodiment of the invention, a method for determining the color coordinates of primary colors that together generate a desired light source, is introduced. The primary colors that generate a desired light source may be red, green and blue LED light sources. The method includes the step of setting the intensity of
25 each of said red, green and blue light sources at a specified test level. The method is followed by the step of measuring the color coordinates of the combined light source by using a color filter. The method then repeats the preceding two steps, so as to measure a plurality of color coordinates of the combined light source, each coordinate corresponding to a different set of test intensity levels for each of the red, green and blue light sources. The method is followed
30 by the step of measuring the primary color coordinates of each of the red, green and blue LED light sources, and finally, providing a feedback arrangement to maintain the intensity of the three LED light sources at a level that leads to a combined light source with a desired chromaticity coordinate.

In accordance with another embodiment of the invention, the different intensity values for each red, green and blue light source is set such that for each set the intensity value of the combined light source remains the same. In accordance with yet another embodiment of the invention many test sets are employed and the primary color
5 coordinates for each of the red, green and blue light sources is calculated by applying a least mean square estimation technique.

Fig. 1 illustrates a block diagram of a primary color identification system in
10 accordance with one embodiment of the invention.

Fig. 2 is plot of a chromaticity diagram employed by the primary color identification system in accordance with one embodiment of the invention.

Fig. 3 is a flow chart illustrating the process of primary color identification in accordance with one embodiment of the present invention.

15 Figs. 4a- 4c illustrate schematic diagrams of tristimulus filters employed in accordance with some embodiments of the invention.

Figs. 5a and 5b are plot diagram illustrating examples of a spectral response function of filters employed in accordance with one embodiment of the present invention.

20 Fig. 1 illustrates a block diagram of a primary color identification system 10 in accordance with one embodiment of the invention. The system is configured to determine the chromaticity coordinates of primary colors generated by red, green and blue LEDs that together provided a white light in an LCD monitor 12. The white light in this example is
25 generated for backlighting the LCD monitor. It is noted that the invention is not limited in scope to this example, and system 10 in accordance with other embodiments of the invention can be employed to determine the color coordinates of primary colors that together form any desired light source.

A filter 14 is disposed in front of monitor 12 so as to measure certain
30 characteristics of the white light generated by LCD monitor 12. As will be explained in more detail later in reference with Figs. 4 and 5, filter 14 in accordance with one embodiment of the invention comprises a photo sensor with color filters that together operate as - what is known in the industry - a tristimulus filter.

Filter 14 is coupled to an interface circuit 16 that is configured to receive the signals generated by filter 14, and condition these signals for use with a primary color identification processor 18. As such processor 18 is coupled to interface 16, and is configured to take the steps necessary to determine the color coordinates of individual red, green and blue LED light sources employed in monitor 12.

The operation and structure of tristimulus filter 14 is well known. Figs. 4(a), 4(b) and 4(c) illustrate block diagrams of three exemplary tristimulus filters that are employed in accordance with various embodiments of the invention. Basically, a tristimulus filter is configured such that the spectral response functions of the filters are directly proportional to the color-matching functions of CIE standard colorimetric observers.

Fig. 4(a) illustrates the arrangement and function of a tristimulus filter 140. The tristimulus filter of Fig. 4(a) includes three glass filters 142, 144 and 146, each of which are configured to filter respectively the red, green and blue lights contained in a light generated by source 122 and reflected by a test object 124. One or more photocells 154 are disposed behind the glass filters to measure the light output for each of the red, green and blue light components. Registers 148, 150 and 152 are configured to store the light information corresponding to CIE 1931 standard observer. Thus, register 148 stores information corresponding to the light passing through filter 142. Similarly, register 150 stores information corresponding to the light passing through filter 144. And, register 152 stores information corresponding to the light passing through filter 146.

To this end, Fig. 5(a) illustrates a plot which depicts the spectral response functions and the degree to which a photocell, such as 154, combined with tristimulus filters 140 may best duplicate the color-matching functions of the CIE 1931 standard observer. The solid curves illustrate the CIE standard observer data, and the dotted curves illustrate response of the photocell with tristimulus filter arrangement.

Other examples of tristimulus filters are illustrated in Figs. 4(b) and 4(c) wherein filter glass layers are disposed over a filter substrate. Therefore, as illustrated in Fig. 4(b) a substrate 168 receives a glass layer 166, overlapped by a glass layer 164, which in turn is overlapped with a glass layer 162. Fig. 4(c) illustrates another variation of glass layers wherein layer 172 does not completely cover layer 174, and layer 174 does not completely cover layer 176.

To this end, Fig. 5(b) illustrates a plot which depicts the spectral response functions and the degree to which a photocell, such as 154, combined with the tristimulus filters 160 or 170, may best duplicate the color-matching functions of the CIE 1931 standard

observer. The solid curves illustrate the CIE standard observer data, and the dotted curves illustrate response of the photocell with tristimulus filter arrangement

System 10 also includes a controller 20 that is coupled to processor 18.

Controller 20 is configured to generate test signals that are estimated by processor 18 in order to determine the color coordinates of each of the red, green and blue light sources employed in monitor 12. Furthermore, controller 20 stores the color coordinate information so as to control the signals used to drive the light sources to maintain the generated light by monitor 12 at a desired level.

In accordance with one embodiment of the invention, controller 20 includes a memory unit 24 coupled to a processor 26. Memory 24 stores, among other information, the primary color coordinates of each of the red, green and blue LED light sources used in monitor 12. Memory 24 is coupled to a signal generator 22, which is configured to generate driving signals, such as current signals, provided to the red, green and blue LED light sources.

Controller 20 includes a feedback arrangement, so as to allow the system to maintain a desired white light generated by monitor 12. This feedback arrangement includes a mixer 28 that is configured to receive feedback signals from monitor 12 so as to compare with the driving signals generated by generator 22. Processor 26 sets the desired signal levels generated by signal generator 22 based on the information stored in memory unit 24.

The operation of primary color identification processor 18 is explained in more detail hereinafter. Generally, the sensation of color is evoked by the physical stimulation of light-sensitive elements in the human retina. This physical stimulation consists of electromagnetic radiation in the visible spectrum comprising wavelengths between 380nm and 780 nm. The light sensitive elements in the human eye, called cones, can be separated into three classes, each class being sensitive to a different spectral distribution of the radiation. As a result, many different spectral distributions can produce the same perceived color. This means that the spectral distribution of two compared colors might differ even when the colors are perceived to match.

However, in an application that employs RGB LED light sources, it is important to identify the color coordinates of each red, green and blue light source components, in order to control and maintain the desired combined light color and intensity.

Fig. 2 is a plot of a chromaticity diagram as defined by the International Lighting Committee, abbreviated as CIE (Commission Internationale de l'Eclairage), and used by processor (18) in accordance with one embodiment of the present invention.

Basically, the CIE chromaticity diagram of Fig. 2 illustrates information relating to a standard set of reference color stimuli, and a standard set of tristimulus values for them.

Typically, the reference color stimuli are radiations of wavelength 700 nm for the red stimulus (R), 541.6 nm for the green stimulus (G) and 435.8 nm for the blue stimulus (B).

- 5 Different color points along curve 60 can be combined to generate a white light depicted at point 62. The chromaticity diagram shows only the proportions of tristimulus values; hence bright and dim colors having the same proportions belong to the same point.

A desired white light at point 62 has coordinates x_w and y_w and intensity I_w , which represents the total lumen output of the white light. The three primary colors, Red, Green and Blue chromaticity coordinates and the lumen outputs for each are donated as (x_R, y_R) , (x_G, y_G) , (x_B, y_B) and I_R, I_G, I_B respectively. The total lumen output and the primary color lumen outputs are related as

$$I_w = I_R + I_G + I_B \quad (1)$$

By normalizing equation (1), the lumen output relationship is defined as

$$15 \quad 1 = I_R' + I_G' + I_B' \quad (2)$$

where I_R' , I_G' , I_B' are called the lumen output fraction of the primary color sources. With the specified chromaticity coordinates of the primary colors and the associated lumen output fractions, it is possible to generate a specified color, such as white, and represent this desired color on the chromaticity diagram via

$$20 \quad \begin{bmatrix} \frac{x_w}{y_w} \\ \frac{1}{y_w} \end{bmatrix} = \begin{bmatrix} \frac{x_R}{y_R} & \frac{x_G}{y_G} & \frac{x_B}{y_B} \\ \frac{1}{y_R} & \frac{1}{y_G} & \frac{1}{y_B} \end{bmatrix} * \begin{bmatrix} I_R' \\ I_G' \\ I_B' \end{bmatrix} \quad (3)$$

From equation (3) it is possible to uniquely determine the coordinates of color points of a light having a desired color with coordinates (x_w, y_w) and a desired lumen output I_w based on the primary color points and their associated lumen fractions.

The LED lumen output is determined by

$$25 \quad I_v(I_f, T) = I_v(I_{test}, 25C) \left(\frac{I_f}{I_{test}} \right) e^{K(T-25C)} \quad (4)$$

where $I_v(I_f, T)$ is the luminous intensity at LED forward current I_f and ambient temperature T , $I_v(I_{test}, 25C)$ is the data sheet luminous intensity at the forward current I_{test} and 25C, and K is the temperature coefficient of the LEDs. A typical K value for AlInGaP is -0.010/C.

Therefore, for a given LED, forward current signal and ambient temperature, it is possible to determine its lumen output based on equation 4, in accordance with one embodiment of the invention as will be described below.

Fig. 3 is a flow chart of a process employed by processor 18 (Fig. 1) to
 5 identify the coordinates of color points for each of the red, green, and blue LED light sources, for example, used in monitor 12. At step 110 processor begins a testing procedure to make the coordinate estimates. Thus at step 112, processor 18 initializes and also sets the number of times n , through which the testing procedure will be accomplished.

At step 114 processor 18 employs equation (4) to estimate the current signal
 10 necessary to establish a lumen output levels, I_{R1} , I_{G1} , I_{B1} , respectively for each of the red, green and blue LED light sources. The estimated current signal value is then provided to controller 20, which provides the current signal to the LED light sources so as to achieve their desired output lumen.

At step 116, processor 18 measures the color coordinates of the light generated
 15 in response to test signal levels set for red, green and blue LEDs. To this end, tristimulus filter 14 provides output levels X_{w1} , Y_{w1} , and Z_{w1} . From this values, processor 18 calculates the corresponding color coordinates x_{w1} and y_{w1} of the light generated by the combination of red, green and blue LEDs based on

$$x_w = \frac{X_w}{X_w + Y_w + Z_w} \quad (5)$$

$$y_w = \frac{Y_w}{X_w + Y_w + Z_w} \quad (6)$$

20

In accordance with one embodiment of the invention, the testing signals and measurements described in reference with steps 114 and 116 are repeated three times. For each testing measurement a driving signal is provided so as to vary the lumen output level of the three red, green and blue LED light sources, so that the three test value sets are

$$\begin{pmatrix} I_{R1} \\ I_{G1} \\ I_{B1} \end{pmatrix}, I_{w1}; \begin{pmatrix} I_{R2} \\ I_{G2} \\ I_{B2} \end{pmatrix}, I_{w2}; \begin{pmatrix} I_{R3} \\ I_{G3} \\ I_{B3} \end{pmatrix}, I_{w3} \quad (7)$$

25

wherein the lumen output level for each of the light sources of each testing measurement can be derived from equation (4) and the lumen output level of the combined light source I_w at each testing measurement is measured by

$$I_w = 683 \cdot Y_w \quad (8)$$

It is noted that the invention is not limited in scope in that respect. For example there could be many more test set values that can be employed in accordance with various embodiments of the invention.

- 5 Based on the test set values employed, the system measures and calculates the chromaticity coordinates of the white light generated by the three red, green, and blue LEDs for each of those sets, so as to derive

$$\begin{pmatrix} x_{w1} \\ y_{w1} \end{pmatrix}, \begin{pmatrix} x_{w2} \\ y_{w2} \end{pmatrix}, \begin{pmatrix} x_{w3} \\ y_{w3} \end{pmatrix} \quad (9)$$

- 10 At step 120, processor 18 calculates the color coordinates of the individual, red, green and blue LED light sources as explained hereinafter. Thus, from equation (3) it is known that

$$\begin{bmatrix} \frac{x_w}{y_w} \\ 1 \\ \frac{y_w}{y_w} \end{bmatrix} * I_w = \begin{bmatrix} \frac{x_R}{y_R} & \frac{x_G}{y_G} & \frac{x_B}{y_B} \\ 1 & 1 & 1 \\ \frac{y_R}{y_R} & \frac{y_G}{y_G} & \frac{y_B}{y_B} \end{bmatrix} * \begin{bmatrix} I_R \\ I_G \\ I_B \end{bmatrix} \quad (10)$$

By substituting equations (7) and (9) into (10), the following matrix equation

$$\begin{pmatrix} \frac{x_{w1}}{y_{w1}} & \frac{x_{w2}}{y_{w2}} & \frac{x_{w3}}{y_{w3}} \\ 1 & 1 & 1 \\ \frac{y_{w1}}{y_{w1}} & \frac{y_{w2}}{y_{w2}} & \frac{y_{w3}}{y_{w3}} \end{pmatrix} * \begin{pmatrix} I_{w1} & 0 & 0 \\ 0 & I_{w2} & 0 \\ 0 & 0 & I_{w3} \end{pmatrix} = \begin{pmatrix} \frac{x_R}{y_R} & \frac{x_G}{y_G} & \frac{x_B}{y_B} \\ 1 & 1 & 1 \\ \frac{y_R}{y_R} & \frac{y_G}{y_G} & \frac{y_B}{y_B} \end{pmatrix} * \begin{pmatrix} I_{R1} & I_{R2} & I_{R3} \\ I_{G1} & I_{G2} & I_{G3} \\ I_{B1} & I_{B2} & I_{B3} \end{pmatrix} \quad (11)$$

- 15 is provided. Therefore, the color coordinates of the red, green and blue LED light sources can be uniquely solved via

$$\begin{pmatrix} \frac{x_R}{y_R} & \frac{x_G}{y_G} & \frac{x_B}{y_B} \\ 1 & 1 & 1 \\ \frac{y_R}{y_R} & \frac{y_G}{y_G} & \frac{y_B}{y_B} \end{pmatrix} = \begin{pmatrix} \frac{x_{w1}}{y_{w1}} & \frac{x_{w2}}{y_{w2}} & \frac{x_{w3}}{y_{w3}} \\ 1 & 1 & 1 \\ \frac{y_{w1}}{y_{w1}} & \frac{y_{w2}}{y_{w2}} & \frac{y_{w3}}{y_{w3}} \end{pmatrix} * \begin{pmatrix} I_{w1} & 0 & 0 \\ 0 & I_{w2} & 0 \\ 0 & 0 & I_{w3} \end{pmatrix} * \begin{pmatrix} I_{R1} & I_{R2} & I_{R3} \\ I_{G1} & I_{G2} & I_{G3} \\ I_{B1} & I_{B2} & I_{B3} \end{pmatrix}^{-1} \quad (12)$$

under the condition that matrix

$$\begin{pmatrix} I_{R1} & I_{R2} & I_{R3} \\ I_{G1} & I_{G2} & I_{G3} \\ I_{B1} & I_{B2} & I_{B3} \end{pmatrix} \quad (13)$$

is nonsingular. This condition can be met if no two test points of

$$\begin{pmatrix} x_{w1} \\ y_{w1} \end{pmatrix}, \begin{pmatrix} x_{w2} \\ y_{w2} \end{pmatrix}, \begin{pmatrix} x_{w3} \\ y_{w3} \end{pmatrix} \quad (14)$$

lay on the same vertical line in the CIE (x,y) diagram of Fig. 2.

In accordance with one embodiment of the invention, processor 18 determines
5 the color coordinates of the red, green and blue LEDs, and provides these coordinates to memory 24 of controller 20.

To this end processor 26 of controller 20 is configured to maintain a desired light color generated by the red, green and blue LEDs by employing equation (3). This follows, because the coordinates of the desired light x_w and y_w are known. In addition,
10 memory 24 contains the color coordinate information for the red, green and blue LEDs. Therefore, the desired lumen output for each of the red, green and blue LED lights sources can be solved. For this desired lumen output, equation (4) provides the desired current signal that should be provided to each of the red, green and blue LEDs via a feedback arrangement as described in Fig. 1.

In accordance with other embodiments of the invention, processor 18 provides
15 the mixed color points test values in a suitable range to coordinate with the characteristics of the color tristimulus filters being used. For example, in order to achieve well-balanced tristimulus color filter outputs, the test points are carefully chosen so that the intensity values of the three red, green, and blue light sources are balanced. This avoids a considerably higher
20 intensity value for one or two light sources in comparison with the remaining light source. Furthermore, in accordance with another embodiment of the invention the test set lumen output levels for the generated light could be chosen such that $I_{w1} = I_{w2} = I_{w3}$ for simpler manipulation and for possible flicker removal. As has been experimentally evaluated, less than 2% light intensity change is not perceivable by human eyes. In another embodiment of
25 the invention, processor 18 performs more than three test sets. In that case, processor 18 employs a least-mean-square estimation to derive the color coordinates of red, green and blue LEDs. For example, if n ($n > 3$) eligible test sets are used, one needs to solve the following equation in least-mean-square fashion

$$\begin{aligned}
 & \begin{bmatrix} \frac{x_{w1}}{y_{w1}} & \frac{x_{w2}}{y_{w2}} & \frac{x_{w3}}{y_{w3}} & \frac{x_{w4}}{y_{w4}} & \dots & \frac{x_{wn}}{y_{wn}} \\ 1 & 1 & 1 & 1 & \dots & 1 \\ y_{w1} & y_{w2} & y_{w3} & y_{w4} & \dots & y_{wn} \end{bmatrix} \cdot \begin{bmatrix} I_{w1} & & & & & \\ & I_{w2} & & & & \\ & & I_{w3} & & & \\ & & & \dots & & \\ & & & & I_{wn} & \end{bmatrix} \quad (15) \\
 & = \begin{bmatrix} \frac{x_R}{y_R} & \frac{x_G}{y_G} & \frac{x_B}{y_B} \\ 1 & 1 & 1 \\ y_R & y_G & y_B \end{bmatrix} \begin{bmatrix} I_{R1} & I_{R2} & I_{R3} & \dots & I_{Rn} \\ I_{G1} & I_{G2} & I_{G3} & \dots & I_{Gn} \\ I_{B1} & I_{B2} & I_{B3} & \dots & I_{Bn} \end{bmatrix}
 \end{aligned}$$

A solution is

$$\begin{bmatrix} \frac{x_R}{y_R} & \frac{x_G}{y_G} & \frac{x_B}{y_B} \\ 1 & 1 & 1 \\ y_R & y_G & y_B \end{bmatrix} = PIQ^T(QQ^T)^{-1}$$

where P is the first matrix in equation 15, I is the second matrix in equation 15, and Q is the forth matrix in equation 15.

In accordance with another embodiment of the invention, the method disclosed in connection with Fig. 3 is repeated for a plurality of different room temperatures, and the chromaticity coordinates for the red, green and blue LED light sources are measured for each of the room temperatures and stored in memory 24 (Fig. 1). Thereafter, during the operation of the system, a temperature sensor measures the operating temperature of the system and retrieves the corresponding chromaticity coordinates so as to maintain the desired color for the light generated by combining the red, green and blue light sources.

Furthermore, the numerical accuracy of identifying color coordinates using the embodiments in accordance with the present invention is better than the prior art measurement scheme described in the background of the invention. As mentioned before, the prior art measurement arrangement utilized a sequential measurement technique, wherein two sets of LEDs were turned off and only one set of LEDs relating to the red, green, or blue color remained "on," so as to measure the color coordinates of the turned "on" LEDs.

The reason that the sequential arrangement approach is not as accurate as the teachings of the present invention can be explained in reference with Figs. 5(a) and 5(b). As illustrated, the color matching functions x, y and z are spread out along the visible wavelength. When only one of the colors, for example Red is measured, with the remaining Green and Blue light sources turned "off," a relatively large measurement value in X is

expected. A medium measurement value in Y and a small measurement value in Z is expected as well.

Similarly, if only one of the colors, for example Blue is measured, with the remaining Red and Green light sources turned "off," a relatively large value in Z, but smaller values in X and Y are expected.

The relative difference of the values of X, Y, and Z could reach one or two magnitudes. In an arrangement wherein a digital controller is employed with a finite word length, and finite resolution, there will be substantially large relative error for small value measurements.

The present invention overcomes this resolution problem, because the three primary colors are ON at the same time, and the X, Y, and Z measurements are performed simultaneously. Therefore, the values of X, Y and Z have much less differences than the prior art arrangement. This results in remarkably less errors in the measurements, and better color estimation and control accuracy.

CLAIMS:

1. A primary color identification system for measuring color chromaticity coordinates of a plurality of red, green and blue light emitting diodes (LEDs) that generate a combined light, said system comprising:

5 a filter located near said LEDs, so as to receive said combined light generated by said red, green and blue LEDs;

said filter configured to provide signals corresponding to light received from each of said red, green and blue LEDs;

said signals provided by said filter enabling measurement of chromaticity coordinates of said combined light;

10 a processor coupled to said filter and configured to receive said signals provided by said filter;

said processor further configured to generate control signals associated with each one of said plurality of red, green and blue LEDs, such that a desired light intensity from each of said LEDs is provided;

15 a driver circuit coupled to said processor to receive said control signals, said driver circuit further coupled to said plurality of red, green and blue LEDs and configured to provide drive signals enabling said LEDs to produce said desired light intensity.

2. The system in accordance with claim 1, wherein

20 said processor generates a plurality of test control signal sets, so that said LEDs produce a plurality of desired light intensity values in a sequential order; and

said processor configured to calculate the chromaticity coordinates of each of said red, green and blue LED light sources in accordance with said chromaticity coordinates of said combined light associated with each of said set of test control signals.

25

3. The system in accordance with claim 2, wherein said processor generates at least three sets of control signals, so that said LEDs, produce at least three desired light intensity values in said sequential order.

4. The system in accordance with claim 2 further comprising means to measure light intensity values corresponding to each one of said red, green and blue LEDs so as to generate a combined light having a desired color chromaticity coordinate.

5. The system in accordance with claim 4, further comprising a feedback control circuit configured to track and maintain said light intensity values that generate a combined light having said desired color chromaticity coordinate.

6. The system in accordance with claim 2, wherein said color chromaticity coordinates of each one of said red, green and blue LEDs is calculated based on 3 tests according to

$$\begin{pmatrix} \frac{x_R}{y_R} & \frac{x_G}{y_G} & \frac{x_B}{y_B} \end{pmatrix} = \begin{pmatrix} \frac{x_{w1}}{y_{w1}} & \frac{x_{w2}}{y_{w2}} & \frac{x_{w3}}{y_{w3}} \end{pmatrix} * \begin{pmatrix} I_{w1} & 0 & 0 \\ 0 & I_{w2} & 0 \\ 0 & 0 & I_{w3} \end{pmatrix} * \begin{pmatrix} I_{R1} & I_{R2} & I_{R3} \\ I_{G1} & I_{G2} & I_{G3} \\ I_{B1} & I_{B2} & I_{B3} \end{pmatrix}^{-1}$$

wherein x_R, x_G, x_B and y_R, y_G, y_B are color coordinates of each of said red, green, blue and x_{w1}, x_{w2}, x_{w3} and y_{w1}, y_{w2}, y_{w3} are colour coordinates of combined light respectively for each of the 3 respective tests in accordance with said test control signals, and $I_{R1}, I_{G1}, I_{B1}, \dots, I_{G3}, I_{B3}$ resp. I_{w1}, I_{w2}, I_{w3} is the intensity value of each of said LEDs, and said combined light respectively, in accordance with said test control signals of each of the 3 tests.

7. The system in accordance with claim 6 wherein said measurement of said color chromaticity coordinates is handled under the condition that the matrix

$$\begin{pmatrix} I_{R1} & I_{R2} & I_{R3} \\ I_{G1} & I_{G2} & I_{G3} \\ I_{B1} & I_{B2} & I_{B3} \end{pmatrix} \text{ is nonsingular.}$$

8. The system in accordance with claim 1, wherein said filter is a tristimulus filter.

9. A method for identifying color chromaticity coordinates of a plurality of red, green and blue light sources that together generate a combined light, said method comprising the steps of:

setting the intensity of each of said red, green and blue light sources at a specified test level;

measuring the color chromaticity coordinates of the combined light;

repeating steps (a) and (b) so as to measure a plurality of color chromaticity coordinates of said combined light, wherein each of said chromaticity coordinates of said combined light correspond to a different set of test intensity levels for each of the red, green and blue light sources;

measuring primary color chromaticity coordinates of each of the red, green and blue light sources.

10

10. The method in accordance with claim 9, wherein said step of measuring the color chromaticity coordinates of said combined light further comprises the step of:

providing a tristimulus filter near said combined light; and

calculating said color chromaticity coordinates of said combined light in accordance with signals provided by said tristimulus filter.

15

11. The method in accordance with claim 9, further comprising the step of estimating light intensity values necessary to obtain said combined light with a desired chromaticity coordinates in accordance with said measured light chromaticity coordinates of each of said red, green and blue light sources.

20

12. The method in accordance with claim 11, further comprising the step of maintaining said estimated light intensity values for each of said red, green and blue light sources by employing a feedback arrangement.

25

13. The method in accordance with claim 11 further comprising the step of measuring said color chromaticity coordinates of said combined light indicated by X_w , Y_w in accordance with

$$x_w = \frac{X_w}{X_w + Y_w + Z_w} \text{ and}$$

$$y_w = \frac{Y_w}{X_w + Y_w + Z_w}$$

30

wherein X_w , Y_w and Z_w are output signals provided by said filter.

14. The method in accordance with claim 13, further comprising the step of measuring said color coordinates of each one of said red, green and blue light sources for 3 tests in accordance with

$$5 \quad \begin{pmatrix} \frac{x_R}{y_R} & \frac{x_G}{y_G} & \frac{x_B}{y_B} \\ \frac{1}{y_R} & \frac{1}{y_G} & \frac{1}{y_B} \end{pmatrix} = \begin{pmatrix} \frac{x_{w1}}{y_{w1}} & \frac{x_{w2}}{y_{w2}} & \frac{x_{w3}}{y_{w3}} \\ \frac{1}{y_{w1}} & \frac{1}{y_{w2}} & \frac{1}{y_{w3}} \end{pmatrix} * \begin{pmatrix} I_{w1} & 0 & 0 \\ 0 & I_{w2} & 0 \\ 0 & 0 & I_{w3} \end{pmatrix} * \begin{pmatrix} I_{R1} & I_{R2} & I_{R3} \\ I_{G1} & I_{G2} & I_{G3} \\ I_{B1} & I_{B2} & I_{B3} \end{pmatrix}^{-1}$$

wherein x_R, x_G, x_B and y_R, y_G, y_B are color coordinates of each of said red, green, blue and x_{w1}, x_{w2}, x_{w3} and y_{w1}, y_{w2}, y_{w3} are colour coordinates of combined light respectively for each of the respective tests in accordance with said test control signals, and $I_{R1}, I_{G1}, I_{B1}, \dots, I_{G3}, I_{B3}$ resp. I_{w1}, I_{w2}, I_{w3} is the intensity value of each of said LEDs, and said combined light

10 respectively, in accordance with said test control signals of each of the 3 tests.

1/5

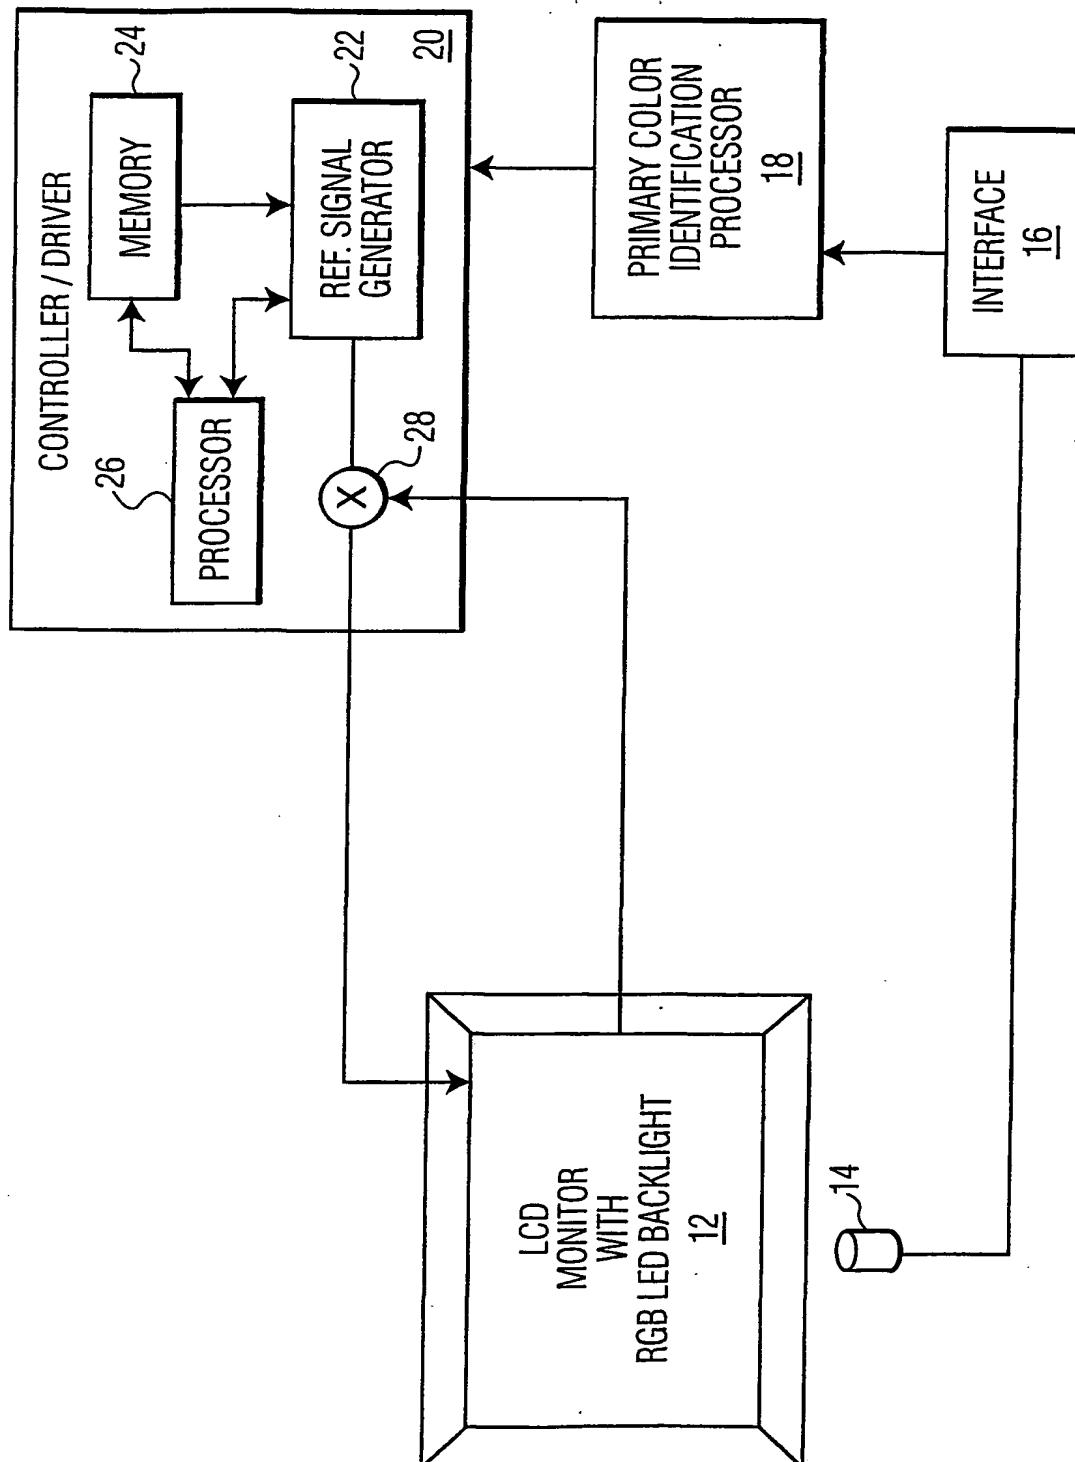


FIG. 1

2/5

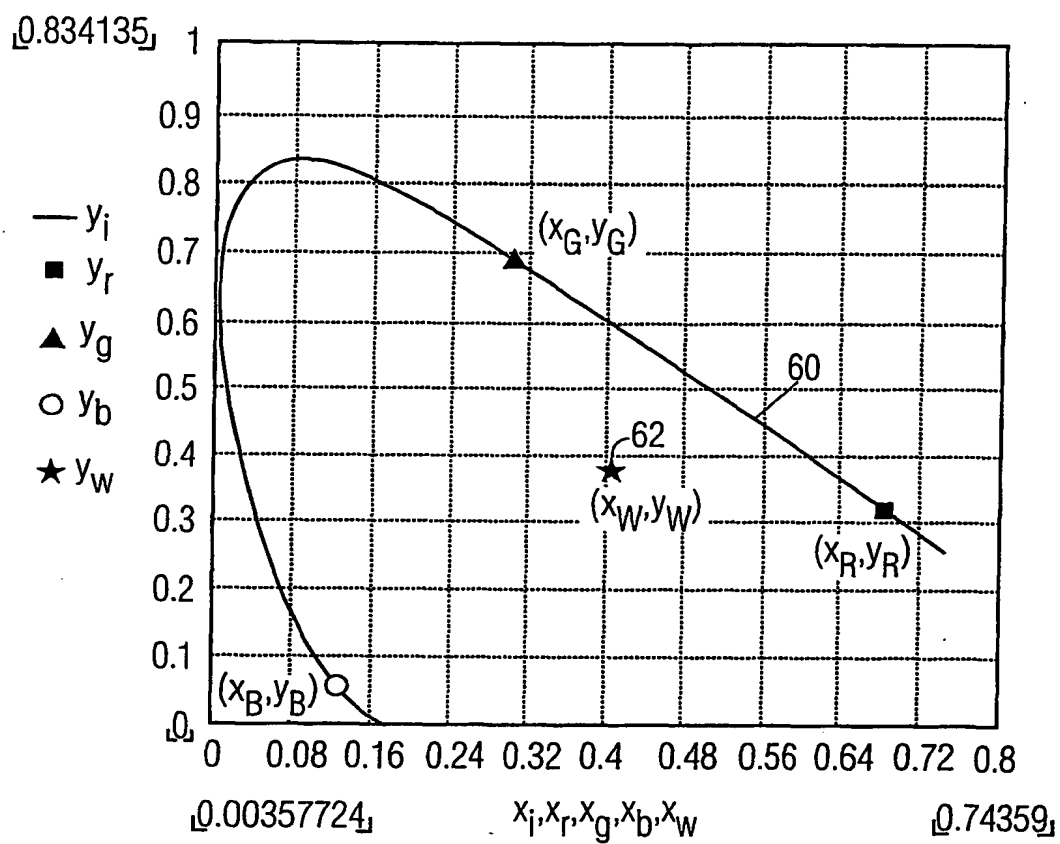


FIG. 2

3/5

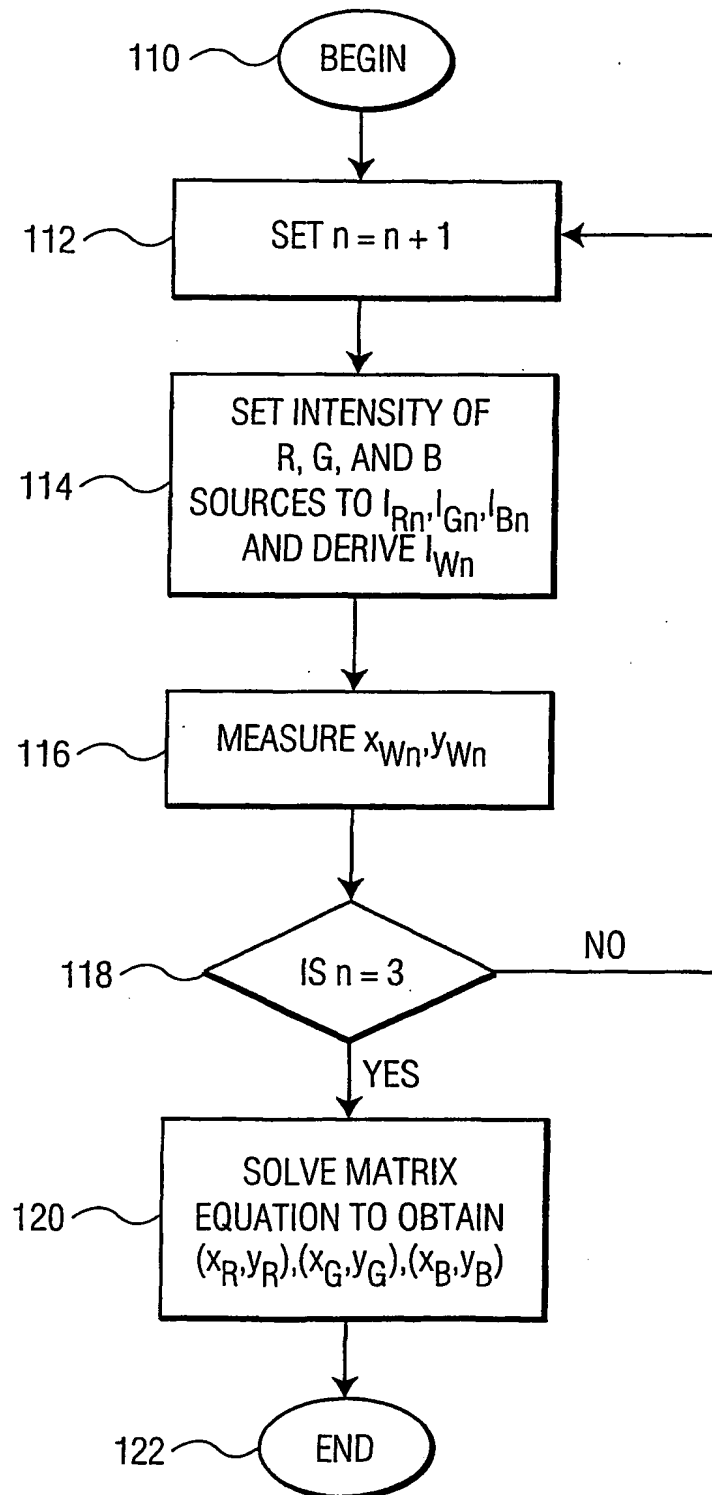


FIG. 3

4/5

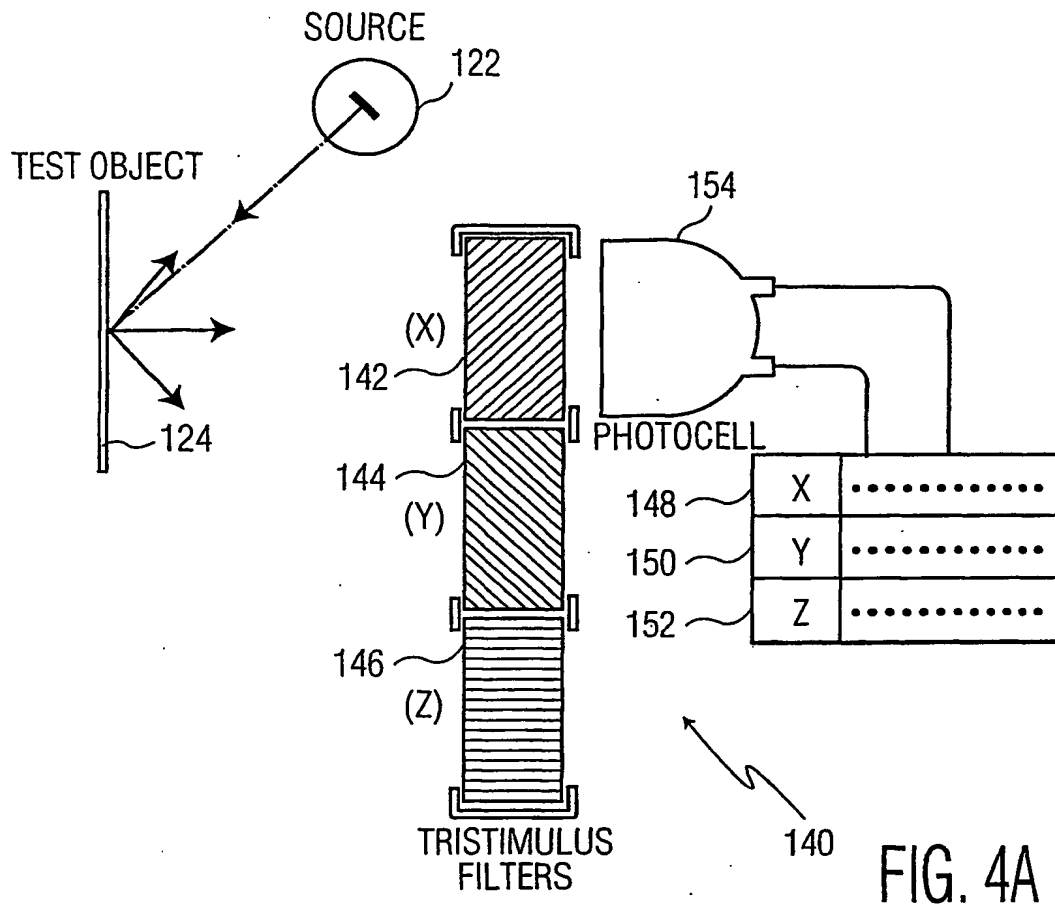


FIG. 4A

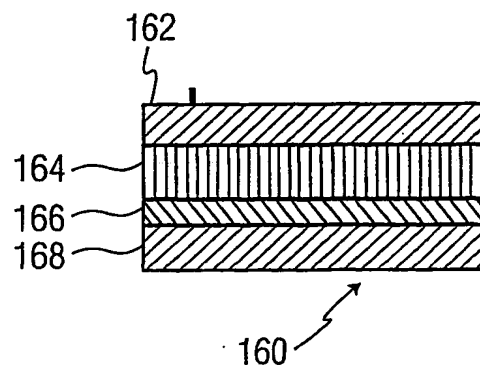


FIG. 4B


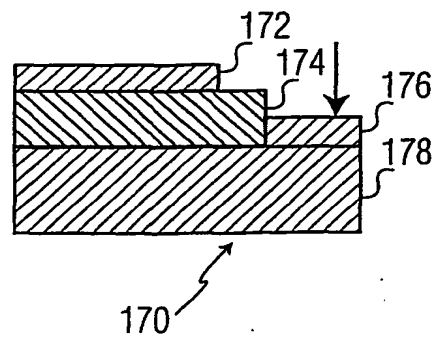



FIG. 4C

5/5

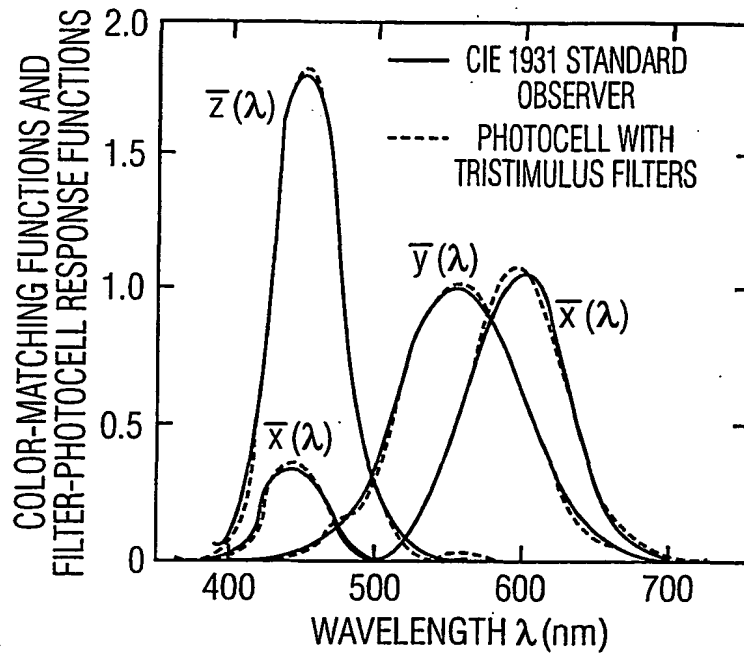

180

FIG. 5A

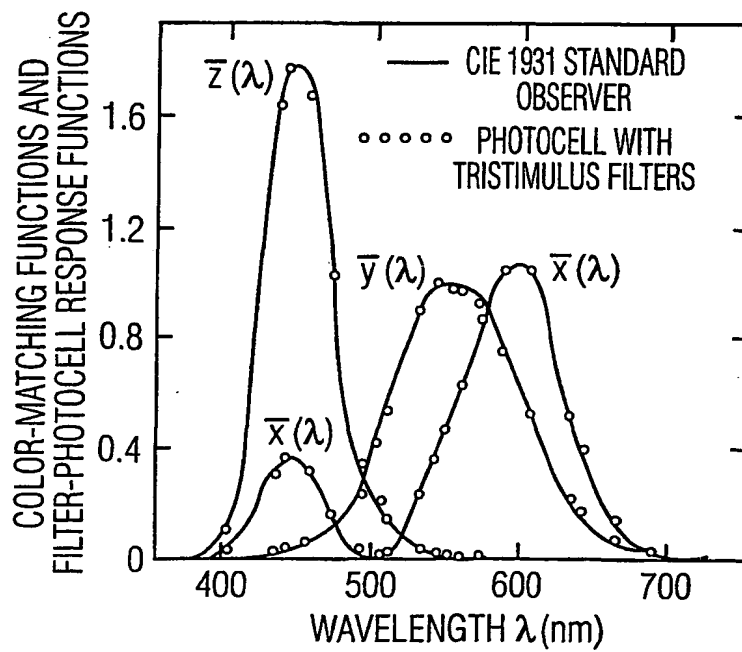

210

FIG. 5B

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
14 November 2002 (14.11.2002)

PCT

(10) International Publication Number
WO 02/090909 A3

- (51) International Patent Classification⁷: G01J 3/51 (74) Agent: DUSSELDORP, Jan, C.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: PCT/IB02/01492
- (22) International Filing Date: 25 April 2002 (25.04.2002) (81) Designated States (*national*): CN, JP, KR.
- (25) Filing Language: English (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (26) Publication Language: English
- (30) Priority Data: 09/851,099 8 May 2001 (08.05.2001) US Published: — with international search report
- (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (88) Date of publication of the international search report: 25 September 2003
- (72) Inventor: CHANG, Chin; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM FOR MEASURING CHROMATICITY COORDINATES

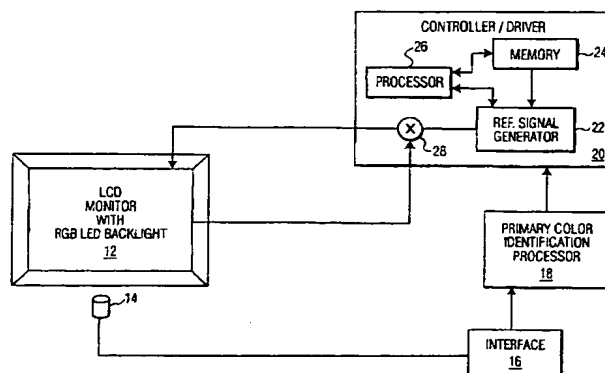

(57) Abstract: A system and method for identifying primary color chromaticity coordinates of a red, green and blue light sources includes a tristimulus filter the receives the combined light generated by the light sources. The light sources are preferably a group of red, green and blue light emitting diodes. A processor is configured to generate a plurality of test control signals that sets a desired intensity value for each of the red, green and blue LEDs. Based on these test control signals, the system is configured to measure three sets of chromaticity coordinates corresponding to the combined light generated by these red, green and blue LEDs. The processor thereafter calculates the color chromaticity coordinates of the LEDs, based on the measured coordinates of the combined light, and the intensity values of the LEDs, and the intensity values of the combined light. This calculation in accordance with one embodiment of the invention is accomplished by solving a matrix equation. Once the color coordinates of the individual light sources is uniquely calculated, the system measures the intensity values of light for each of the light sources that is necessary to provide a combined light with a desired color chromaticity coordinates. These intensity values can be used in a feedback control circuit to maintain the desired combined light as the LEDs change their characteristics from batch to batch or over time.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 02/01492

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01J3/51

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 127 783 A (MARSHALL THOMAS M ET AL) 3 October 2000 (2000-10-03) abstract	1,9
A	US 3 389 265 A (SCHRECKENDGUST JAY G) 18 June 1968 (1968-06-18) claim 1	1,8
A	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 01, 29 January 1999 (1999-01-29) & JP 10 281873 A (ROHM CO), 23 October 1998 (1998-10-23) abstract	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

4 September 2002

Date of mailing of the international search report

11/09/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

De Buyzer, H

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 02/01492

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6127783	A	03-10-2000	CN 1291282 T WO 0037904 A1 EP 1056993 A1	11-04-2001 29-06-2000 06-12-2000
US 3389265	A	18-06-1968	BE 680296 A GB 1105192 A	31-10-1966 06-03-1968
JP 10281873	A	23-10-1998	NONE	